



***MISTRAL 6***  
***MANUAL***



Dear Swing customer,

You have just purchased a sophisticated product. We place great importance on our workmanship and the high quality of the materials used.

If you have any questions which are not answered in this manual, please do not hesitate to contact your Swing dealer or us directly: Tel: +49 81 41 32 77 888 or [info@swing.de](mailto:info@swing.de)

From

the Swing Team

## **Table of Contents:**

1	Disclaimer and exclusion of liability .....	1
2	For your safety .....	1
3	Respect for nature and the landscape .....	2
4	Features of the Paraglider .....	3
4.1	What does the MISTRAL 6 look like? .....	3
4.2	Who is the MISTRAL 6 suitable for? .....	3
4.3	Connecting a harness to the MISTRAL 6 .....	4
4.4	Winch towing .....	4
4.5	Motorised flight .....	4
5	Setting up the MISTRAL 6 and test-flying .....	4
5.1	Laying out the paraglider and pre-flight check .....	4
5.2	5-point check .....	5
5.3	The first flight .....	5
5.4	Adjusting the main brake lines .....	6
5.5	Adjusting the speed system .....	6
5.6	Adjusting the brake handles .....	7
6	Flying .....	9
6.1	Normal flight .....	9
6.2	Instructions for extreme flying and dangerous situations .....	9
6.3	Rapid descents .....	12
7	Looking after your paraglider .....	14
7.1	Transporting and storing the paraglider .....	14
7.2	Checking the lines .....	15
7.3	Cleaning and repairing the paraglider .....	15
8	Inspections .....	16
9	Warranty .....	17
10	Disposal .....	17
11	Internet – product information and safety notices .....	17

# 1 Disclaimer and exclusion of liability

Use of this paraglider is solely at the USER'S OWN RISK. THE CERTIFICATION AND THE WARRANTY SHALL BE RENDERED INVALID if changes of any kind (including changes to the brake lines) or improper repairs are made to this paraglider or if any inspections are missed (annual and 2-yearly check).

Failure to observe the instructions on looking after your paraglider will also render the warranty invalid.

Pilots are responsible for their own safety. Before every flight, the pilot must check the glider's airworthiness and should launch only if it is fit to fly. The pilot must check the weather forecast and only fly if both current and forecasted conditions guarantee a safe flight.

The glider may only be used with a pilot's licence which is valid for the area or under the supervision of an approved flying instructor. There shall be no liability on the part of third parties, in particular the manufacturer and distributor.

In terms of the warranty and guarantee conditions, the paraglider must not be flown if any of the following situations exists:

1. the inspection period has expired, you have carried out the inspection yourself, or the inspection has been carried out by an unauthorised inspector
2. the take-off weight does not fall within the permissible overall take-off weight range
3. the glider is flown in rain, drizzle or cloud or when there is fog or snow;
4. there are turbulent weather conditions or wind speeds on launch higher than 2/3 of the maximum flyable airspeed of the glider. This speed will also depend on the total take-off weight.
5. the glider is used for aerobatics / extreme flying or flight manoeuvres at an angle greater than 90°;
6. the pilot has insufficient experience or training;
7. the wrong equipment or inadequate equipment (reserve, helmet, footwear etc) is used;
8. the glider is used for winch launching using a winch which has not been inspected or by non-licensed pilots and/or winch operators;
9. modifications have been made to the canopy, lines or risers which have not been approved;
- 10. the glider is opened in free fall - this is not a parachute.**

## 2 For your safety

- The use of paragliders is subject to various regulations. They may not be flown without a valid certification. Any attempt to fly is highly dangerous.
- This manual does not replace the need to attend a paragliding school.
- The paraglider may only be used for the purpose for which it is designed. Do not use it as a parachute under any circumstances
- In Germany, paragliders are not subject to the certification requirements of the German federal aviation administration. Take note of the relevant regulations in your own country.
- Use of the paraglider is at your own risk. The manufacturer is not legally responsible for any personal injury or material damage which occurs in connection with Swing paragliders.
- A specialist must test-fly the paraglider. The test-flight must be recorded on the paraglider information label.

- Do not under any circumstances tow your paraglider with a car, motorboat or any similar vehicle which is not fitted with a suitable towing system operated by an experienced winch operator.
- Before towing, ensure that the winch operator has the appropriate training and licences.
- Aerobatics are prohibited.
- Flying with a wet canopy or when it is raining is prohibited; it may cause the glider to stall
- Do not under any circumstances alter the construction of your paraglider. If you do, any claims under the warranty will not be accepted and the certification will lapse.
- When you fly for the first time, use training slopes only
- When flying, always wear a helmet, gloves, suitable clothing and shoes which protect your ankles.
- Only fly if the wind speed, direction and weather conditions guarantee a safe flight.

This manual contains more information concerning your safety. This information is indicated by two symbols.



**Caution! Accident risk!**

This symbol indicates risks which may arise. We also explain how to avoid the risk or how you should react if the situation arises.



**Tip**

This symbol is used when we give advice on correct handling of the paraglider, how to protect it from damage and general information.

### 3 Respect for nature and the landscape

Paragliding is an outdoor sport, we hardly need to say.

Please practise the sport in such a way that nature and the landscape are protected! Keep to marked trails, remove your rubbish, refrain from making unnecessary noise and respect the sensitive biological equilibrium in the mountains and other areas where you fly. Consideration for nature is required from the time you set off for the launch site.

## 4 Features of the Paraglider

### 4.1 What does the MISTRAL 6 look like?

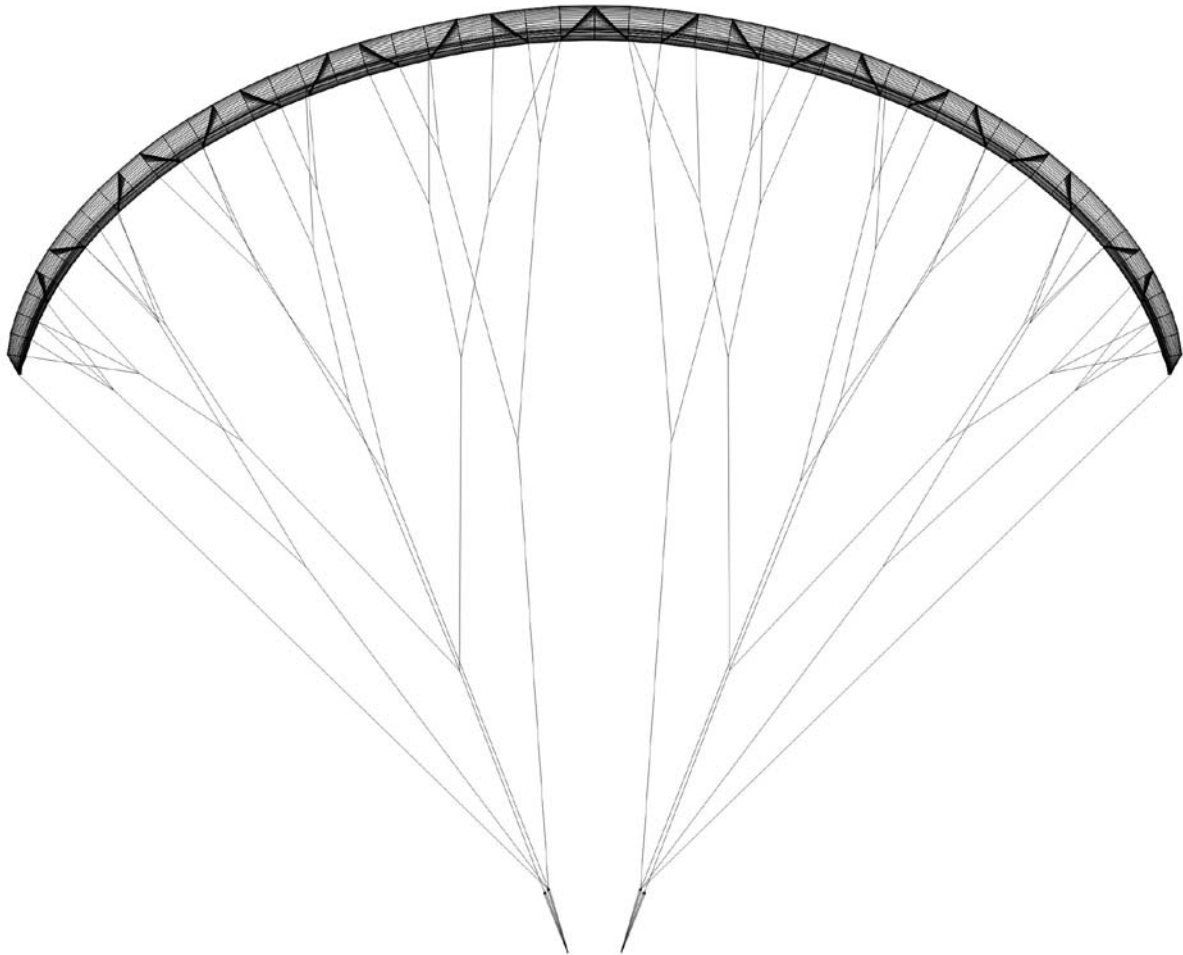


Figure 1: Diagram of the MISTRAL 6 (front view )

### 4.2 Who is the MISTRAL 6 suitable for?

The Mistral 6 is particularly well-suited for performance-oriented social pilots who appreciate direct handling combined with very good glide and excellent thermic qualities. It offers total flight enjoyment with a high performance and safety level.

The MISTRAL 6 is not suitable as a learner glider.

#### Classifi- cation

- EN B
- Take-off-weight (pilot + equipment + glider). The estimated weight of the equipment is about 20 kg

## 4.3 Connecting a harness to the MISTRAL 6

The MISTRAL 6 can be connected to any harness which has DHV "GH" harness classification. You can find out more about this on the DHV website at [www.dhv.de](http://www.dhv.de).

## 4.4 Winch towing

The MISTRAL 6 is suitable for winch-towing. Make sure that the brakes are unclipped when the paraglider takes off. Use weight-shifting while towing to assist the steering. Use of a suitable towing aid is not imperative but highly recommended in all cases. It increases pilot safety during the towing stage. Swing also offers an optional adjustable tow adaptor (Pro-Tow), which facilitates the tow procedure during launch and pre-accelerates the canopy during this stage by about 2cm.

Swing always advises using the towing-aid to increase the safety of towing activities.



### Tip

Winch-towing is only recommended and permitted if:

- the pilot has completed the appropriate training.
- the winch and release used have a certificate of compliance which covers the towing of paragliders.
- the winch operator has adequate training which includes the towing of paragliders.



### Caution! Accident risk!

The most common cause of stall on winch is releasing the A-risers too early while the glider is rising. The pilot should ensure here that the canopy is indeed above him before the "start" command is given.

## 4.5 Motorised flight

In Germany certification for paramotor use is governed by the DULV (German Ultralight Association). Please ask your equivalent national organisation about regional regulations.

There is further information at [www.dulv.de](http://www.dulv.de)

# 5 Setting up the MISTRAL 6 and test-flying

## 5.1 Laying out the paraglider and pre-flight check

### Laying out the paraglider

Place the paraglider with the upper surface against the ground and spread it out so that the leading edge is slightly curved.

Carefully separate all the rigging-lines and take care that no lines are underneath the canopy, tangled or caught up in any way.



### Caution! Accident risk!

If there are obvious folds in the glider because it has been stored away for a long time or tightly packed, then the pilot should carry out some practice inflations before first launch and smooth out the trailing edge a little. This ensures that the flow profile is correct during launch.

It is particularly important in low temperatures that the trailing edge is smoothed out.

### Pre-flight check

#### Before launching, always check the following:

1. Are there any tears in the glider or other damage?
2. Have all the lines been untangled?
3. Are the brake lines clear and tightly connected to the handle?
4. Are the brake lines properly adjusted?
5. Are the quick links fastened securely to the lines and to the risers?
6. Is the canopy dry?
7. Are the risers and seams in good condition?
8. Is the harness in good condition?
9. Is the handle for the reserve chute secure?

## 5.2 5-point check

We recommend that you carry out the following 5-point check immediately before launching:

1. Is the canopy arranged in a half moon shape and are all the air-entrances open?
2. Are all the lines untangled? Are there any lines under the canopy?
3. Check your equipment: harness, carabiners, reserve, helmet. **Are the leg straps done up?**
4. Is the weather, particularly wind strength and direction, such that a safe flight is ensured?
5. Are the airspace and launch area clear?

## 5.3 The first flight



### Tip

Carry out your first few flights only during stable weather conditions, and in a familiar area or on a training slope.

To start with, you should steer gently and carefully so that you can get used to the reactions of the paraglider while you are not under stress.



### Caution! Accident risk!

Do not overestimate yourself! Don't let a paraglider that can easily be manoeuvred or the behaviour of other pilots make you careless.



## 5.4 Adjusting the main brake lines

**Securing the main brake lines** The main brake lines must be checked by an expert before the test-flight.  
The main brake lines must be fastened so that the mark is visible slightly above the knot (approx. 5mm).

**Correct adjustment** Correctly installed brake lines have about 10 cm of feed. This is how far you must pull the brakes down before the trailing edge of the canopy starts to move downwards and start braking. The manufacturer has pre-set this. It will allow you to steer and launch the paraglider without any delay.

Modern gliders such as the MISTRAL 6 have less tolerance with regard to the adjustment of the brake lines. The view which used to prevail, i.e. that the length of the brake lines can be adjusted according to the pilot's height, no longer applies. Swing therefore points out that the factory setting of the brakes should not be altered. If you are in any doubt, please compare with the brake line length in the service booklet.

**Too long** If the brake lines are too long, the paraglider reacts slowly and is difficult to land. However during the flight you can twist the brake lines around your hands to minimise this problem. Adjust the brake lines to a suitable length after you have landed.



### **Caution! Accident risk!**


If the brake lines are too short, the following risks could arise:

- there could be an early stall.
- the paraglider does not launch well and there is a risk of deep-stall.
- the paraglider's behaviour in extreme flying is dangerous.

## 5.5 Adjusting the speed system

Although the MISTRAL 6 is already trimmed to a sufficiently high basic speed, it is also equipped with a speed system. You will use it in particular if there is a strong headwind, when you fly over valleys or if you want to leave a dangerous area quickly.

**Function** The A-, B- and C-risers can be shortened by using the speed bar. This decreases the canopy's original angle of attack.

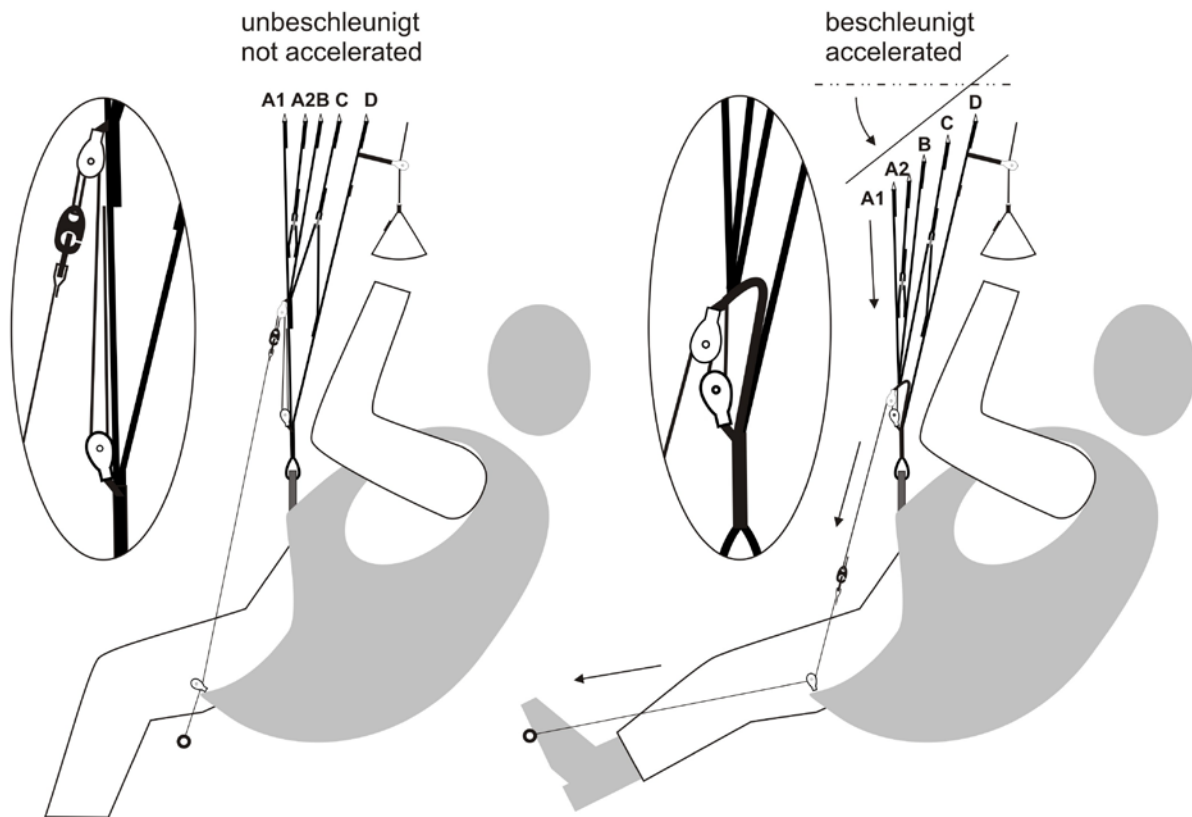

**Figure 2: How the Speed system of the MISTRAL 6 works**



**Caution! Accident risk!**

Disturbances (e.g. collapses) are more dramatic with increased speed than when the glider is unaccelerated. Because of the increased risk of collapse, we strongly recommend that you do not use the speed system in turbulent areas or near the ground.

Test the system in advance. It is best to do this suspended from a frame. Tie the lines to the speed bar at the right length. You should still be in a comfortable flight position even when the speed system is used to its full extent.

**Adjustment**

Do not make the speed system too short or you will not be able to access it easily. You will not be able to use the speed system to its full potential if it is too long.

## 5.6 Adjusting the brake handles

The MISTRAL 6 comes with Swing's Multigrip brake handles, which are fitted with swivels to prevent the brake lines from twisting.

There is also a choice of reinforcement for the brake handles allowing them to be adjusted to suit the pilot's particular preferences. There are 4 levels of firmness possible using various combinations of the reinforcing. The pilot is able to choose the appropriate level by simply taking out or inserting the various parts.



Fig 1: Removing and inserting SWING Multigrip reinforcement

## 6 Flying

### 6.1 Normal flight

**Launch** Pull the MISTRAL 6 up ensuring your arms and the lines are down and behind you. Hold both the A-risers, without shortening them too much. The MISTRAL 6 launches very smoothly and is easy to control. Launching is even easier if the canopy is arranged in a half-moon shape.

The MISTRAL 6 is suitable for reverse-launching from 3m/s wind.



#### **Tip!**

The pilot must work actively to keep the Mistral 6 on the ground in high wind speeds (from approx. 6m/s). Otherwise the glider may rise above the pilot unintentionally.

**Level flight** The MISTRAL 6's flight is stable and level when the brakes are up.

**Turns** The MISTRAL 6 performs best in turns when it is flown with sufficient speed. Too much braking increases the sink rate unnecessarily.

The glider has no negative tendency.

**Landing** Start pulling down the brakes as far as they will go when you are approximately 1 to 1.5 meters above the ground, so that the paraglider has been fully braked just before the ground is reached. The MISTRAL 6 can be landed without any problem.



#### **Caution! Accident risk!**

Always fly with sufficient speed when you are near the ground (well above the stall speed).

### 6.2 Instructions for extreme flying and dangerous situations

#### **Sources of danger**

There are no problems during a normal flight. However, pilot error during the flight or extreme wind conditions may leave the wing in an unusual flying position. This may require the pilot to make corrections during flight to which he is unaccustomed.

In this section we explain how to correct any extreme situations you may get into. We also describe how the MISTRAL 6 reacted in simulations during test-flights.



#### **Tip**

These instructions do not replace safety training or specialised literature. We recommend that you undertake special safety training which will prepare you for extreme situations.

You should deploy your reserve if the recovery instructions do not return the glider to a controlled flying position or if there is not sufficient ground clearance to carry out the recovery.



### **Caution! Accident risk!**

Always keep within the recommended limits. Do not perform aerobatics or extreme flying manoeuvres, such as spirals with "big ears". This will prevent accidents caused by overloading the glider.

### **Deep stall**

Various things can cause a paraglider to deep stall, e.g. shrinkage of the C and D lines as a result of dampness or flying in the rain. The airflow from the front of the glider gradually breaks away towards the back and the canopy sags, with the glider remaining upright. Paragliders are particularly susceptible to deep stalls if the wing loading is too low.

C and D lines which are too short, for example, can often be recognised because launch behaviour deteriorates.

You can recognise a deep stall because there is less flight noise than normal. In addition, your sink rate will increase (4-5 m/s).

*Recovery*    Remain in an upright position and push the A- and B-risers in the direction you are flying, so as to shorten them by 5 to 10 cm.

If you have a speed system, simply use it to accelerate. After you have landed safely, the length of the lines must be checked.



### **Caution! Accident risk when canopy is wet or in rain!**

A wet canopy or flying in the rain increase the risk of stall. In these circumstances, you will be outside of the normal operating limits of the paraglider. If you are unable to avoid flying in the rain for any reason, you should observe the following:

1. during rain and after it has stopped, we strongly recommend that you continue flying with slight acceleration (at least 30% or more),
2. in general, apply the brakes as little as possible,
3. do not use "big ears",
4. the control travel will be reduced,
5. avoid making tight turns, particularly in your final approach. It is recommended that you continue flying with slight acceleration even during this stage of your flight, as long as conditions permit.
6. in any event, avoid undesirable positioning of the canopy and possible early stall near the ground (and, therefore, release the speed bar slowly).

## Front Stall

Strong turbulence can cause part or all of the leading edge of the glider to fold or tuck under.

Normally the MISTRAL 6 will immediately recover its normal flight position.

*Recovery* If the MISTRAL 6 does not immediately recover from a frontal tuck, brake quickly and strongly with both steering-lines (brake lines) to re-inflate the glider.

## Asymmetric tucks

If there is turbulence, one side of the paraglider may collapse. Some of the cells deflate and the paraglider could collapse or spin.

*Recovery* During test flights the MISTRAL 6 self-recovered on release of the A-risers which were pulled down and caused the collapse.

- Counter-brake slightly on the side of the paraglider that is still inflated to stop it turning away and to stabilise it.
- Counter-brake just enough that the paraglider continues to fly straight ahead.
- If the wing has not yet self-recovered, pump with the brake on the side that has collapsed in order to open it, making use of the full braking distance. "Shaking" is not enough.



### Caution! Accident risk!

Counter-braking too strongly can result in a stall on the inflated side.

## Full Stall

A full stall occurs if full brake is applied during the flight. The paraglider slows down, surges backwards and deflates. If the brakes are held down, the canopy comes up over the pilot again. The result is an almost vertical descent with a sink rate of about 8m/s.

*Recovery* Fully release the brakes within 3 seconds. If you release the brakes too slowly, the paraglider may spin. The spin stops automatically when the brakes are released completely.



### Caution! Accident risk!

If the canopy has gone backwards, you must hold the brakes down. Otherwise the canopy can surge forward and, in an extreme case, end up underneath the pilot. Hold the brakes down until the canopy is above you again.

## Spin

Spins occur when one side of the canopy stalls. The stalled part of the canopy continues to fly forward while the other side turns in the opposite direction.

*Recovery* Quickly release the brakes.



### Tip

If the spin does not stop:

- Check whether you have released the brakes fully.
- If this does not work, use your reserve.



### Caution! Accident risk!

In strong turbulence, always keep far enough away from rock faces and other obstacles. You need time and enough height to recover from extreme situations.

## 6.3 Rapid descents

In many situations you need to lose height very quickly to avoid dangerous situations, e.g. the upcurrent from a cumulus cloud, an approaching cold front, a storm front etc. Below we explain three ways to make a rapid descent, so that you can avoid these situations and similar ones.

### Spiral dives

The spiral dive is the classic method for making a rapid descent. It is particularly suitable where there is a high ascent rate and little wind. Generally the DHV certification tests differentiate between rates under and over 14 m/s and tests are carried out accordingly. With the MISTRAL 6, the canopy automatically recovers within one turn under the 14 m/s rate. Above 14 m/s, breaking the outside half of the wing and/or weight shifting to the outside may be required to recover from the spiral. With a sink rate up to 20 m/s, however, the spiral does not tighten automatically. The DHV tests are carried out with a carabiner distance (centre to centre) of 42cm.

*Starting the manoeuvre* Whilst flying at full speed, start to apply the brake on one side. This will steer the paraglider into a turn with a strong bank. You can tell that you are in a spiral dive if you are being pressed hard against your seat (high centrifugal force).

When you are in a spiral dive, you should steer very carefully because the paraglider will react immediately. Banking and rate of turn increase if braking efficiency increases. Look down before and during a spiral dive so that you can tell how far you are from the ground!



### Tip

When you are in a spiral dive, the outer part of the wing can collapse, but this is no cause for concern. You can avoid this by braking slightly in the outside of the turn. Release the brakes carefully.

*Recovery* If you release the brakes too quickly, the increased speed can cause the wing to climb, become unsettled, or partly collapse.

If the glider does not stop turning, you can stop it by weight-shifting to the outside of the turn.



### **Caution! Accident risk!**

With spiral dives, very high turn speeds can be reached, with an increase in the acceleration (up to over 6g) due to gravity. So be careful when you try this!

- Do not continue the spiral dive too long; you could lose consciousness.
- Never attempt this with less than 150 to 200 meters ground-clearance.
- Spiral dives with "big ears" lead to extreme loading of the open section of the canopy. This move is prohibited in Germany.

### **B-line Stall**

The B-line stall is another way to descend rapidly and has a sink rate of approximately 8 m/s. It is suitable where there is an average ascent rate and little wind.

*Starting the manoeuvre* Grasp both B-risers at the mallions by the coloured mark. Pull both of them evenly down until the airflow is gone and the wing goes into a vertical descent flight mode. The B-risers should then be held in the same position to ensure a gentle descent.



#### **Tip:**

Pull down the B-risers only until there is no airflow. The glider could go into a horseshoe if they are pulled down any further.

Check before and during the B-line-stall that the airspace beneath you is free.

*Recovery* Return the B-risers to their normal position quickly and evenly. If you put the B-risers back too slowly, a deep stall or negative spin could occur.



### **Caution! Accident risk!**

The canopy speeds up after the B-risers have been released. Under no circumstances should you apply the brakes at this time.

This manoeuvre should be avoided in low air temperatures. Pilots should be aware that this increases the tendency to deep stall.



#### **Tip**

If the paraglider does not speed up immediately because recovery is too slow or for some other reason, accelerate using the speed system or pull the A-risers forwards.

### **Big ears**

"Big ears" is another way to descend quickly and has a sink rate of approximately 3 to 5 m/s. The forward speed stays the same. You can use the "big ears" method together with the speed system. It is suitable for avoiding a dangerous situation where there are high ascent rates and strong wind.

*Starting the manoeuvre* Pull both outer A-risers downwards. You can now descend safely on the stable middle part of the wing. Steer by weight-shifting. The brakes must not be applied during the manoeuvre, e.g. by wrapping the brakes.



**Recovery** Let go of both A-risers. If the ears do not open automatically, assist the opening process by pumping the brakes.



**Caution! Accident risk!**

When the technique of "big ears" is used, there is a higher load for the line groups which are still weight-bearing. Do not fly any extreme manoeuvres with "big ears".

This manoeuvre should be avoided in low air temperatures. Pilots should be aware that this increases the tendency to deep stall.

## 7 Looking after your paraglider

### 7.1 Transporting and storing the paraglider

**Packing your paraglider** To prevent damage to the leading edge reinforcement of your paraglider and to avoid kinks, we recommend that you pack it by folding "cell to cell". This will help avoid putting unnecessary stress on the reinforcement by bending it.

**Transport** Always transport your paragliding equipment in the special backpack and/or in the inner bag.

**Storing** Store all of your paragliding equipment away from UV light in a dry room which is well-aired and has a constant temperature. Open the backpack and/or inner bag and the belt a little so that air can get in.

Protect your equipment from high temperatures. Where possible, do not leave your paraglider in vehicle parked in the sun.



**Tip**

- Sunlight, warmth and humidity can damage your equipment.
- Temperatures lower than -10°C and higher than 50°C can make the wing unfit to fly. The manufacturer's warranty will not apply if the paraglider is not stored at the correct temperature.
- Temperatures above 70°C alter the characteristics of the Dyneema lines. Never store a paraglider which was packed up while still wet.

If the paraglider gets wet, spread it out immediately so that air reaches all parts of it. Since the fibres absorb water, it can take several days until it is completely dry. If a paraglider is stored wet, it can become unsuitable for flying after a short time.

## 7.2 Checking the lines

**Line length** Measuring the length of the lines is part of the regular paraglider inspection.

The lines must be measured with a load of 5kg to get comparable results. You will find the original line measurements in the service and inspection manual.

Have your paraglider checked at least every two years by the manufacturer or an authorised inspector. In Germany, pilots have been able to carry out the inspection themselves since 01.07.2001 provided that they fulfil all requirements. See part 8, "Inspections" for more information.



### Tip

We recommend an inspection every 50 to 100 flight hours or once a year.

## 7.3 Cleaning and repairing the paraglider

**Cleaning** Only clean the paraglider with a soft sponge and clean water.



### Tip

Harsh chemical substances, high-pressure cleaners or steamers will destroy the paraglider's surface layer. Clean the paraglider only if it is absolutely necessary.

**Repairs** Repairs should only be carried out by the manufacturer or a specialist recommended by the manufacturer.

You can repair small tears in the wing yourself using self-adhesive sail material, as long as they are in places which do not bear heavy loads, are not at the seams and are not bigger than 3 cm



### Tip

Always replace lines that are damaged immediately.

If you need to replace damaged or worn-out parts, use only original parts or parts that have been authorised by the manufacturer.

## 8 Inspections

- General** Failure to observe the inspection periods shall invalidate the warranty and certification.  
A properly completed logbook will help you to comply with these periods.  
There is more information on inspections and technical data in two separate booklets, both of which form part of this manual:
- 1) Inspection instructions for Swing gliders (required only in Germany and Austria)
  - 2) Service papers (1 booklet for each size and model) – for Download see our Website : [www.swing.de](http://www.swing.de) → Products → MISTRAL 6
- Inspection periods** In Germany, Swing gliders must be inspected as follows (check the situation in your country):
- A) For tandem gliders (if used commercially) and gliders used by schools an inspection (the same as the 2-yearly check) must be carried out every 12 months from the purchase date.
  - B) Gliders for personal use and tandem gliders (not used commercially) must be inspected every 2 years from the purchase date.
  - C) The paraglider must be inspected after 150 hours of use (including ground handling) if this occurs prior to the periods in A) and B) above.
- Ground handling time must be at least doubled when working out the total hours of use because of the increased wear and tear on the glider.
- Validity of inspection** If Swing is to accept guaranty and warranty claims, all inspections must be carried out by SWING, or an inspection agent authorised by SWING. The documentation and the result of the inspection must be clearly identifiable by the inspector (date and place / name of inspector) and be entered near the glider information/certification sticker.
- Inspections by the pilot** Pilots in Germany have been able to carry out the inspection themselves since 01.07.2001 provided that they fulfil all requirements. However, in this event, SWING's liability and warranty lapse. There are more details on these inspections in a separate booklet (Swing paragliders inspection instructions)

## 9 Warranty

**General** The terms of the warranty are in the enclosed warranty card.

Please remember to return the warranty card to Swing within 14 days after you purchase the paraglider.

**Online Warranty Registration:**

You also can make your warranty registration online at: [www.swing.de](http://www.swing.de) → service → online warranty. You will receive a confirmation email after you have registered.

If you do not have an email address, enter [info@swing.de](mailto:info@swing.de) as the email address in the mandatory field.

The manufacturer must be notified immediately of any defects in the product, variations or changes in flight behaviour and any warranty claims and, if necessary, the glider must be made available for inspection by the manufacturer.

## 10 Disposal

Even the best products and materials have only a limited useful life. The synthetic materials used in a paraglider must be disposed of properly. Please ensure that you dispose of your SWING glider properly if it has reached the stage where its useful life is over. If you wish, you can return it to us and we will then dispose of it for you.

## 11 Internet – product information and safety notices

**swing.de** Swing now sends relevant product and safety information by email to all registered customers. If you would like to receive this, please register your name through our website.

Swing generally includes all email addresses provided in the warranty cards in the distribution list. If you do not wish to be included, please do not give your email address on the warranty card. We will not provide your e-mail address to any third parties.

Swing also offers a wide range of accessories for your glider and useful products for pilots on its homepage.

Our website: [www.swing.de](http://www.swing.de)

**dhv.de** There is also data and information about our products on the DHV website [www.dhv.de](http://www.dhv.de).

**We hope you have fun and many enjoyable flights on the MISTRAL 6**

The **SWING** Team